



**AFFILIATED
RESOURCES**
CARGO TRAILER SOLUTIONS

Innovation for every component. Integrity for every mile.

CARGO FLOORS & RAMPS




PAKTITE

ENHANCED CARGO FLOOR

Best in Class Strength

- Moisture Resistant
- Uniform Density Throughout
- Proven PAKtite Manufacturing Technology

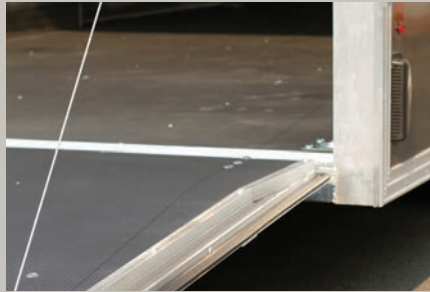

TREDX TREME

TEXTURED HDPE CARGO FLOOR

Premium Finished Appearance

- Slip-resistant
- Impervious to Fuels, Oils and Chemicals
- Easy to Clean



AQUA PLY+

AQUA SEAL® TREATED PLYWOOD CARGO FLOOR

Long Life Span

- Withstands Heavy Wear and Tear
- Structurally Strong and Stable
- Appearance Grade Face

CARGO WALLS & CEILINGS



PAKTITE

ENHANCED CARGO WALL

Strong, Stiff, Stable

- Sanded for Clean, Consistent Appearance
- No Voids, No Knots, No Holes
- Proven PAKtite Manufacturing Technology



DYNACORE

HARDWOOD PLYWOOD CARGO WALL

High Value, Low Cost

- Lightweight
- High Bending Strength
- Softwood Plywood Alternative



DYNACORE

VINYL-FACED HARDWOOD PLYWOOD CARGO WALL

Clean, Bright Appearance

- Heavy-duty Polyvinyl Laminate
- Easy to Clean
- Color Coordinated Trim to Match

CARGO FLOORS & RAMPS



TESTED, CERTIFIED, PROVEN

PAKtite® is a moisture-resistant, performance engineered oriented strand board floor and ramp panel with greatly enhanced physical properties.

- Multi-layer Fiber Orientation
- CARB Compliant MDI Exterior Glue
- Industry Best Warranty

THICKNESS	WEIGHT
19/32"	1.78 LBS./SQ.FT.
23/32"	2.25 LBS./SQ.FT.



ULTIMATE DURABILITY

TRED-eXtreme® is an engineered and structurally rated floor and ramp panel with a high-density polyethylene overlay laminated to one or both sides.

- Tremendous Abrasion Resistance
- Hides Scratches and Gouges
- Moisture Barrier

THICKNESS	PLY COUNT	WEIGHT
1/2"	5	1.68 LBS./SQ.FT.
5/8"	5 OR 7	1.83 LBS./SQ.FT.
3/4"	6 OR 7	2.34 LBS./SQ.FT.



WILL NOT ROT

AQUA PLY PLUS® is a specialty plywood floor and ramp panel that is pressure-treated with AQUA SEAL® preservatives and kiln-dried after treatment.

- Preservatives are Fixed into Cell Structure
- Kiln-dried after Pressure-treating
- Limited Lifetime Warranty

THICKNESS	PLY COUNT	WEIGHT
1/2"	5	1.5 LBS./SQ.FT.
5/8"	5 OR 7	1.78 LBS./SQ.FT.
3/4"	6 OR 7	2.25 LBS./SQ.FT.

CARGO WALLS & CEILINGS



SUPERIOR RACKING STRENGTH

PAKtite® is a uniformly dense, performance engineered oriented strand board wall and ceiling panel with greatly enhanced physical properties.

- Engineered to Lay Flat for Easy Installation
- Emulsified Wax/Acrylic Edge Seal
- Industry Best Warranty

THICKNESS	WEIGHT
3/8"	1.20 LBS./SQ.FT.
15/32"	1.63 LBS./SQ.FT.



APPEARANCE GRADE

Dyna Core® is an appearance grade hardwood plywood wall and ceiling panel comprised of multiple layers of straight-grained Meranti veneer.

- Tight Veneer Core Lines
- CARB Compliant Type II Glue
- Meets SFM Tropical Species Standards

THICKNESS	WEIGHT
2.7MM	0.34 LBS./SQ.FT.
3.4MM	0.38 LBS./SQ.FT.
5.2MM	0.56LBS./SQ.FT.
9MM	1.00 LBS./SQ.FT.



RESISTS STAINS & CHEMICALS

Dyna Core® LV is a hardwood plywood wall and ceiling panel with a polyvinyl chloride protective film face.

- Hardwood Plywood Substrate
- Laminated Vinyl with EVA Glue
- Customized Colors and Thicknesses

THICKNESS	WEIGHT
2.7MM	0.49 LBS./SQ.FT.
3.4MM	0.53 LBS./SQ.FT.
5.2MM	0.71 LBS./SQ.FT.
9MM	1.16 LBS./SQ.FT.



**AFFILIATED
RESOURCES**
CARGO TRAILER SOLUTIONS

Affiliated Resources, Inc. produces innovative component parts that have superior physical properties based on substantial advances in raw material applications, adhesive technology and wood/plastic lamination.

We stand behind our products and guarantee their performance in your cargo trailer.