



## DYNA SPAN FOR QUALITY


### CONSTRUCTION

- Dyna Span® is a performance engineered, jumbo-sized, oriented strand board floor panel specifically designed and manufactured for the RV Industry.
- Dyna Span is comprised of many long, thin wood fiber strands selectively formed into multi-layered mats and bonded together with exterior grade adhesives at high temperatures.
- Dyna Span strands are precisely calibrated and proportionally oriented into dimensionally stable panels that have superior racking strength and impact load resistance.

### CERTIFICATION

- Dyna Span is produced with fully certified process-control equipment to ensure full compliance with all industrial and performance rated end-use requirements.
- Dyna Span is manufactured to meet or exceed the standards of U.S. Product Standard PS 2 and all APA—Engineered Wood Association performance rated requirements.
- Dyna Span is made with MDI and phenol formaldehyde exterior grade adhesives.
- Dyna Span qualifies for a blanket exemption from U.S. HUD Standard and CARB regulations.

### One Seamless Jumbo Panel

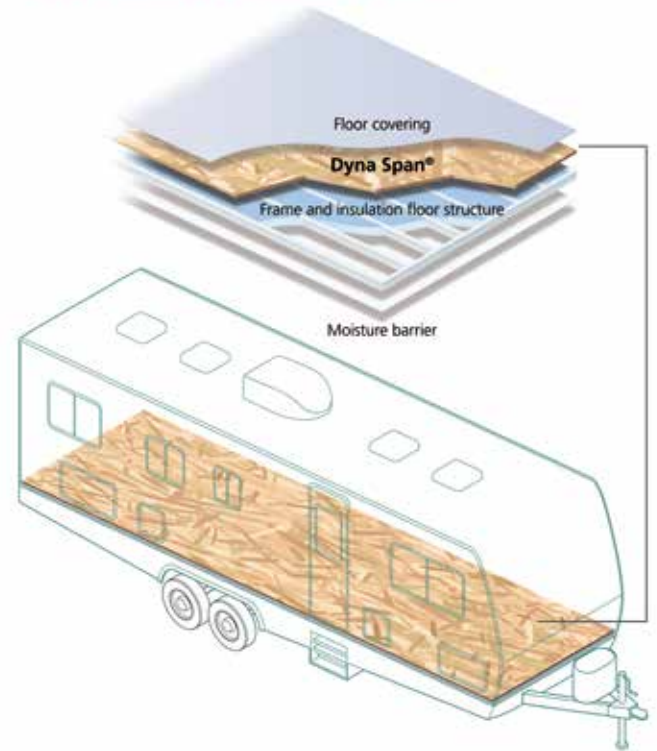

## DYNA SPAN FOR PERFORMANCE

### SPECIFICATIONS

**Thicknesses:** 3/8" through 23/32"  
**Max. Size:** 102" x 289"

Thickness	Weight
3/8"	1.27 lbs./sq.ft.
15/32"	1.51 lbs./sq.ft.
19/32"	1.89 lbs./sq.ft.
23/32"	2.19 lbs./sq.ft.

Dyna Span is packaged with protective bags and unitized with plastic straps and corner protectors banded to 1-1/2" runners.

### HANDLING

Keep Dyna Span free from moisture and contaminants.

Store indoors on a flat surface, or covered and above ground away from standing water.

Dyna Span may support mold growth and is at risk of fungal decay if exposed to high moisture environments or repeated wetting.

For best performance, acclimatize Dyna Span to local equilibrium moisture content before using.

### WARRANTY

Dyna Span will perform as structural RV sub-flooring when properly installed by an approved RV manufacturer in accordance with accepted industry practices.

Dyna Span sub-floor panels are guaranteed against delamination and manufacturing defects for a minimum of 25 years. See the Dyna Span Warranty for full details.

Affiliated Resources will not be held liable for any incidental or consequential damages, nor damages that are the result of the misuse or improper installation of Dyna Span panels.



**AFFILIATED RESOURCES**  
 PROVIDING SOLUTIONS