



# AQUA<sup>®</sup> BEAM+


- LIFETIME WARRANTY -

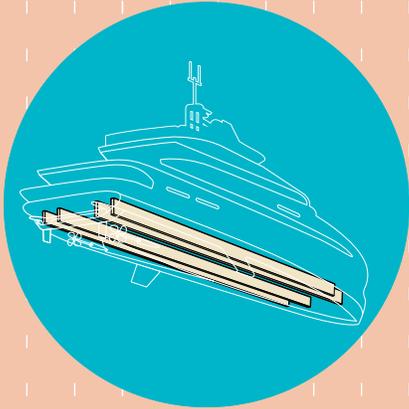

LONG, STRAIGHT, STRONG

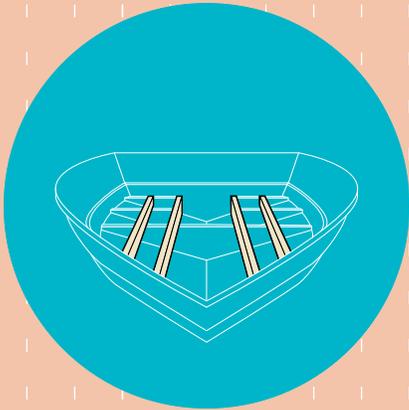

SUPERIOR STRUCTURAL SUPPORT

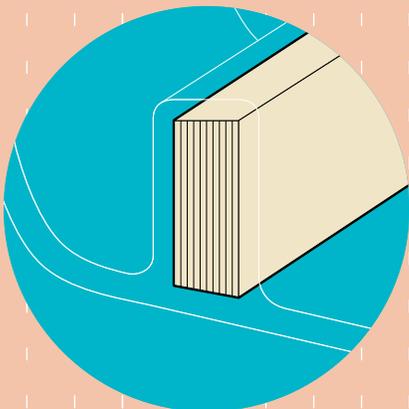

PARALLEL-ALIGNED MULTI-LAYER CONSTRUCTION

## GREATER LOAD CAPACITY

### STRUCTURALLY ENGINEERED FOR BOAT STRINGERS

A lifetime warranted long-length boat stringer that is pressure-treated with AQUA SEAL<sup>®</sup> preservatives and kiln-dried after treating.

## STRONGER AND STRAIGHTER

Group I veneer pre-graded for parallel alignment in a continuous line press  
Bonded with high solid-content marine-type exterior glues  
Engineered to increase compressive strength in the long direction

## COMPLETE PRESERVATIVE PENETRATION

Pressure-treated with AQUA SEAL<sup>®</sup> copper oxide formulated preservatives  
Multi-step vacuum/pressure process assures 100% preservative penetration  
Highly insoluble active ingredients fix into wood cell structure and do not leach


## ADVANCED KILN-DRYING PROCESS

Uniformly kiln-dried after treating for dimensional stability  
Carefully controlled kiln temperature system assures best performance  
Completely bondable with all adhesives and resin systems

## AN AQUATECH MARINE PRODUCT

2211

# SUPERIOR STRINGER SYSTEMS

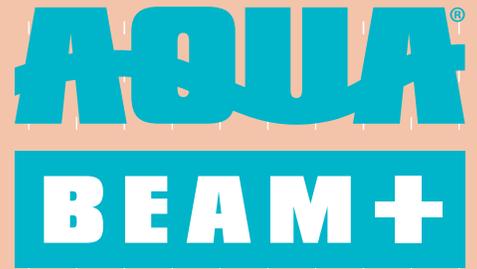

- LIFETIME WARRANTY -

## PRODUCT SPECIFICATIONS

### CERTIFIED STANDARDS

- + AQUA BEAM PLUS® billet manufacturing specifications meet or exceed the standards of PS 2 as outlined by the U.S. Department of Commerce.
- + AQUA BEAM PLUS is manufactured, graded, and regularly audited in accordance with APA- Engineered Wood Association SCL performance standard rules.
- + AQUA SEAL® copper oxide formulated waterborne preservatives meet the AWPA Standard P-5.
- + AQUA BEAM PLUS is pressure-treated in accordance with AWPA U1 and Category Standard UC4B.

<b>SPECIES</b>	Western Group 1
<b>GLUE BOND</b>	High solid-content phenol formaldehyde exterior glue
<b>PRESERVATIVE</b>	AQUA SEAL copper oxide formulated waterborne preservative
<b>MOISTURE CONTENT</b>	Uniformly kiln-dried after treating
<b>NOMINAL THICKNESS</b>	1-1/4", 1-1/2", 1-3/4"
<b>SIZE</b>	3-1/2" through 14" wide by 96" (8') through 240" (20') long
<b>PACKAGING</b>	Straps banded using corner protectors to runners

**INSTALLATION** AQUA BEAM PLUS can be sawn, drilled, routed, shaped and edge-planed. Hot-dipped zinc-coated (galvanized) or silicone bronze fasteners can be used in most applications. For best performance, use stainless steel 304 or 316 fasteners.

1-1/4" THICKNESS		1-1/2" THICKNESS		1-3/4" THICKNESS	
WIDTH	WEIGHT/LINEAL FOOT	WIDTH	WEIGHT/LINEAL FOOT	WIDTH	WEIGHT/LINEAL FOOT
3-1/2"	1.16 lbs.	3-1/2"	1.40 lbs.	3-1/2"	1.70 lbs.
5-1/2"	1.82 lbs.	5-1/2"	2.20 lbs.	5-1/2"	2.68 lbs.
7-1/4"	2.40 lbs.	7-1/4"	2.90 lbs.	7-1/4"	3.38 lbs.
9-1/4"	3.20 lbs.	9-1/4"	3.70 lbs.	9-1/4"	4.45 lbs.
11-7/8"	4.00 lbs.	11-7/8"	4.70 lbs.	11-7/8"	5.48 lbs.
14"	4.70 lbs.	14"	5.54 lbs.	14"	6.44 lbs.

### WARRANTY

AQUA BEAM PLUS panels carry a lifetime limited warranty against fungal decay, against attack by termites, and against manufacturing defects like delamination. See the AQUA TECH® Warranty for details. Affiliated Resources will not be held liable for any incidental or consequential damages, loss of time or use damages, nor any damages that are the result of any misuse or improper installation of AQUA BEAM PLUS panels.