




TRED[®]EX TREME

INDUSTRIAL FLOORING
FOR PLATFORMS AND PICK MODULES

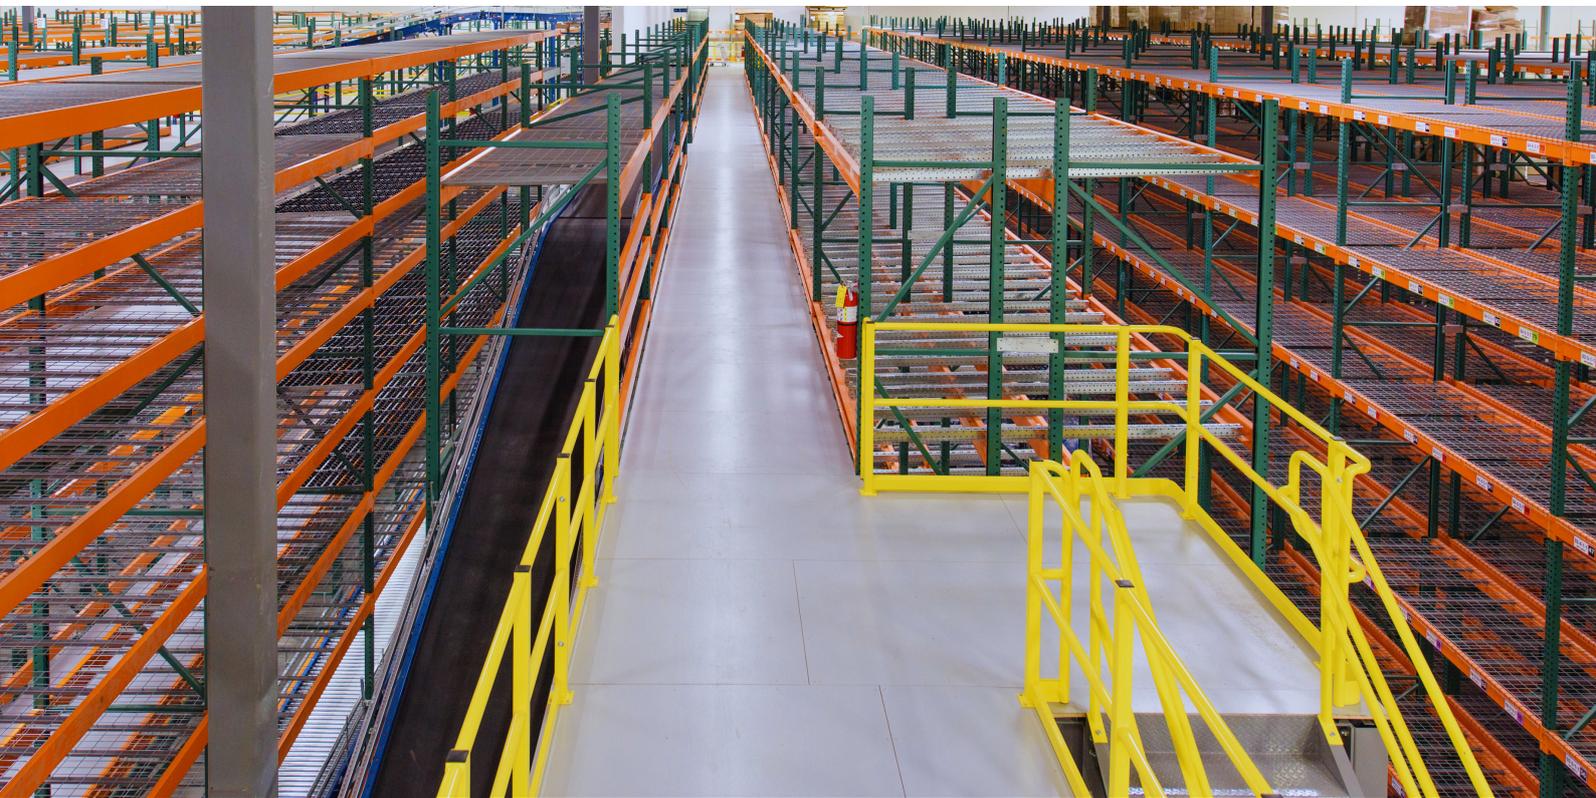

DESIGNED ENGINEERED TRUSTED

Specifications

1/2", 3/4", 1-1/8"x4'x8' T&G 2LE or 4E (standard panel size)



Available sizes up to 5' x 10' (Cut-to-size & custom machining available)



LAMINATES & SUBSTRATES

HIGH DENSITY POLYETHYLENE (HDPE) or POLYPROPYLENE (PP)

- Laminated on one or two sides
- 100% moisture barrier
- Superior abrasion resistance
- Color pigmentation throughout hides scratches
- Deflects wheel loads over a larger footprint



PROVEN SUBSTRATES

TRED-EXTRA®

Heaviest duty substrate without added cost. TRED-eXtra® is rated & warranted for wheel load traffic without any laminate. When TRED-eXtra® is specified as a substrate, higher wheel loads are achieved with thinner laminates.

PLYWOOD

Structurally rated; can be used with or without corrugated substructure. Can withstand repeated wetting and drying cycles (Available with Class A Fire-Rating or preservative treatment).

ORIENTED STRAND BOARD (OSB)

Structurally rated; can be used with or without corrugated substructure

WHY TRED-eXtreme®?

BENEFITS AND FEATURES

- Special additive available to reduce static conductivity
- USDA accepted
- Flame Spread Rating (ASTM E-84) Class C (III)
- Full face (width and length) panels

*Wheel loads have been determined using 3/4" substrate, independent laboratory tests and extensive field work. The wheel load refers to the front tine, and the rating includes the weight of the pallet jack

WHEEL LOADS

Engineered to accommodate a variety of wheel loads

Laminate Thickness	Plywood Substrate	OSB Substrate	TRED-eXtra® Substrate
.030" HDPE	Foot Traffic	Foot Traffic	Foot Traffic, Carts to 1000lb
.050" HDPE	Carts to 2000lb	Carts to 2000lb	Pallet Jacks to 3500lb
.100" HDPE	Pallet Jacks to 2860lb	Pallet Jacks to 2860lb	Pallet Jacks to 3500lb

APPLICATIONS & FASTENING

COMMON APPLICATIONS

- Work Platforms & Mezzanines
- Pick Modules
- Food and Beverage Applications
- Robotics
- Stage Floors

FASTENING SYSTEMS

TRED-eX® Tek Screws come collated with painted heads to match TRED-eXtreme® panel finishes, designed for use with stand-up screw guns. These self-drilling, self-countersinking fasteners provide faster, more efficient installation.

Loose screws available upon request.



WARRANTY

Affiliated Resources, LLC warrants TRED-eXtreme® to be free of manufacturing defects, including glue line failure, for five (5) years from the date of purchase. Affiliated Resources will not be held liable for any incidental or consequential damages, nor any damages that are the result of the misuse or improper installation of TRED-eXtreme®.

See TRED-eXtreme® warranty for full details

